




## Modular Partition Panels

### Advantages of using Modular Wall Panels

- Easy for fabrication and erection at site.
- Lower in cost & flexible.
- Smooth, comfortable & easy to clean.
- Doors compatible with panel material.



- Better in asthetic looks
- Easy for shifting modular cleanrooms instead of structural rooms.

Sr. No.	THICKNESS	STANDARD DIMENSIONS	BONDED WITH	DENSITY
1	50 MM	3000 x 1200	Polyurethane PUF	37kg / m3
2	60 MM	3000 x 1200	Polyurethane PUF	37kg / m3
3	80 MM	3000 x 1200	Polyurethane PUF	37kg / m3
4	100 MM	3000 x 1200	Polyurethane PUF	37kg / m3

## Cleanroom Modular Doors

### Salient features:

- Galvanized and stainless steel in M.O.C.
- Powder coated upto 80 microns.
- High density 40kg/m3 Pre Insulated.
- Framing in high gauge galvanized steel powder coated.



### Specifications:

- Single leaf & double leaf shutters
- Standard width 2000mm, Standard height 2100mm
- Frame thickness available are 75 & 100 mm
- Size & specification are customized as per requirement.

Single Door Sizes	Double door sizes
750 X 2100mm	1200 X 2100mm
900 X 2100mm	1500 X 2100mm
1000 X 2100mm	1800 X 2100mm
1200 X 2100mm	2000 X 2100mm

### Accessories:

- S. S. ball bearing hinges.
- Overhead door closure.
- Dead lock with cylinder.
- Automatic door drop seal.
- S. S. 12" D-handle.




## HEPA Housing / Terminal Box

Terminal housing is used to fixing filter in ceiling / slabs. With these housing you can load / remove filter without any wastage of production time.

### • Slab Mounted Housing - Top / Side connection.

- Mode of G.I. / CRCA powder coated / SS - 304.
- Available in Single skin/Double skin.
- D.O.P and Pressure Port.
- Suitable for Box Type filter.
- Bottom loading / top loading filter Arrangement in side connection.
- G.I. / Aluminium Damper.

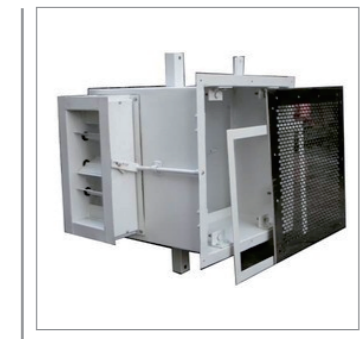

### • False Ceiling Mounted Housing is also available

## Riser

### • Risers have following features and specification.

- Mode of G.I. / CRCA powder coated / SS - 304.
- Type - Box Type / Front openable / Flange Type.
- Damper - Aluminum / GI
- Filter - Pre Filter.
- Perforated sheet - SS 304 / Aluminum powder coated.

